



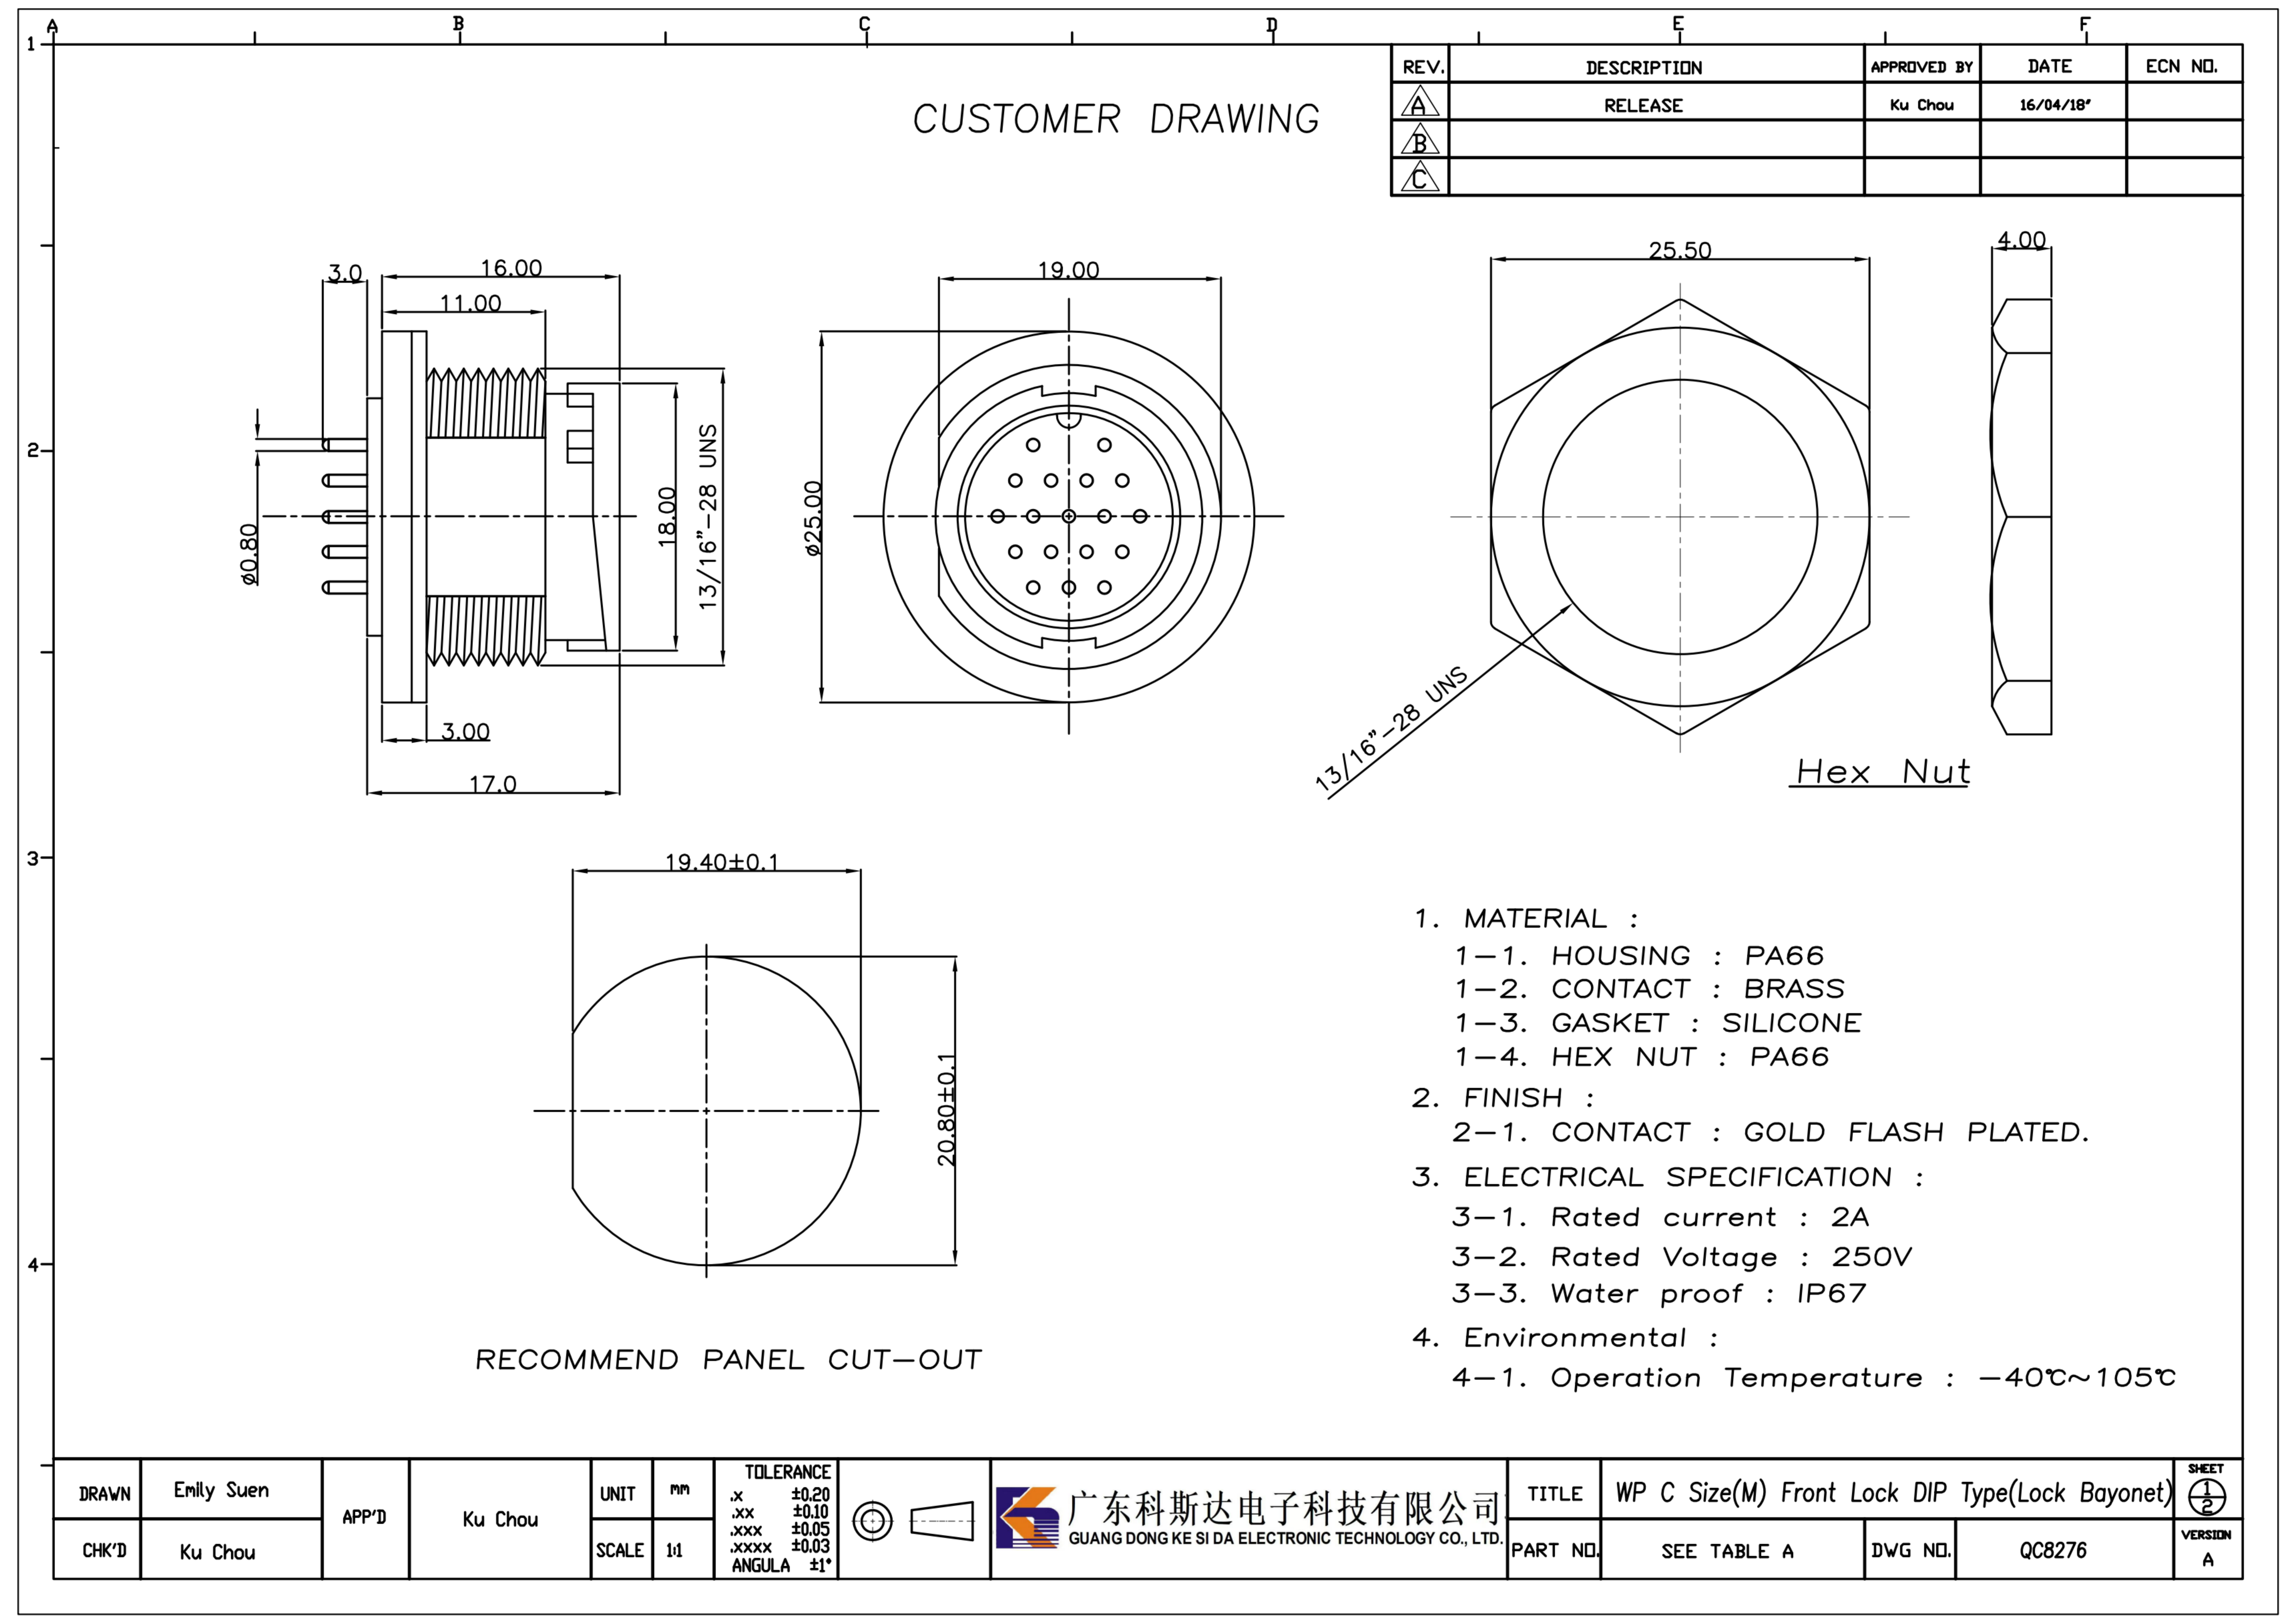

CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Ku Chou	16/04/18	
B				
C				

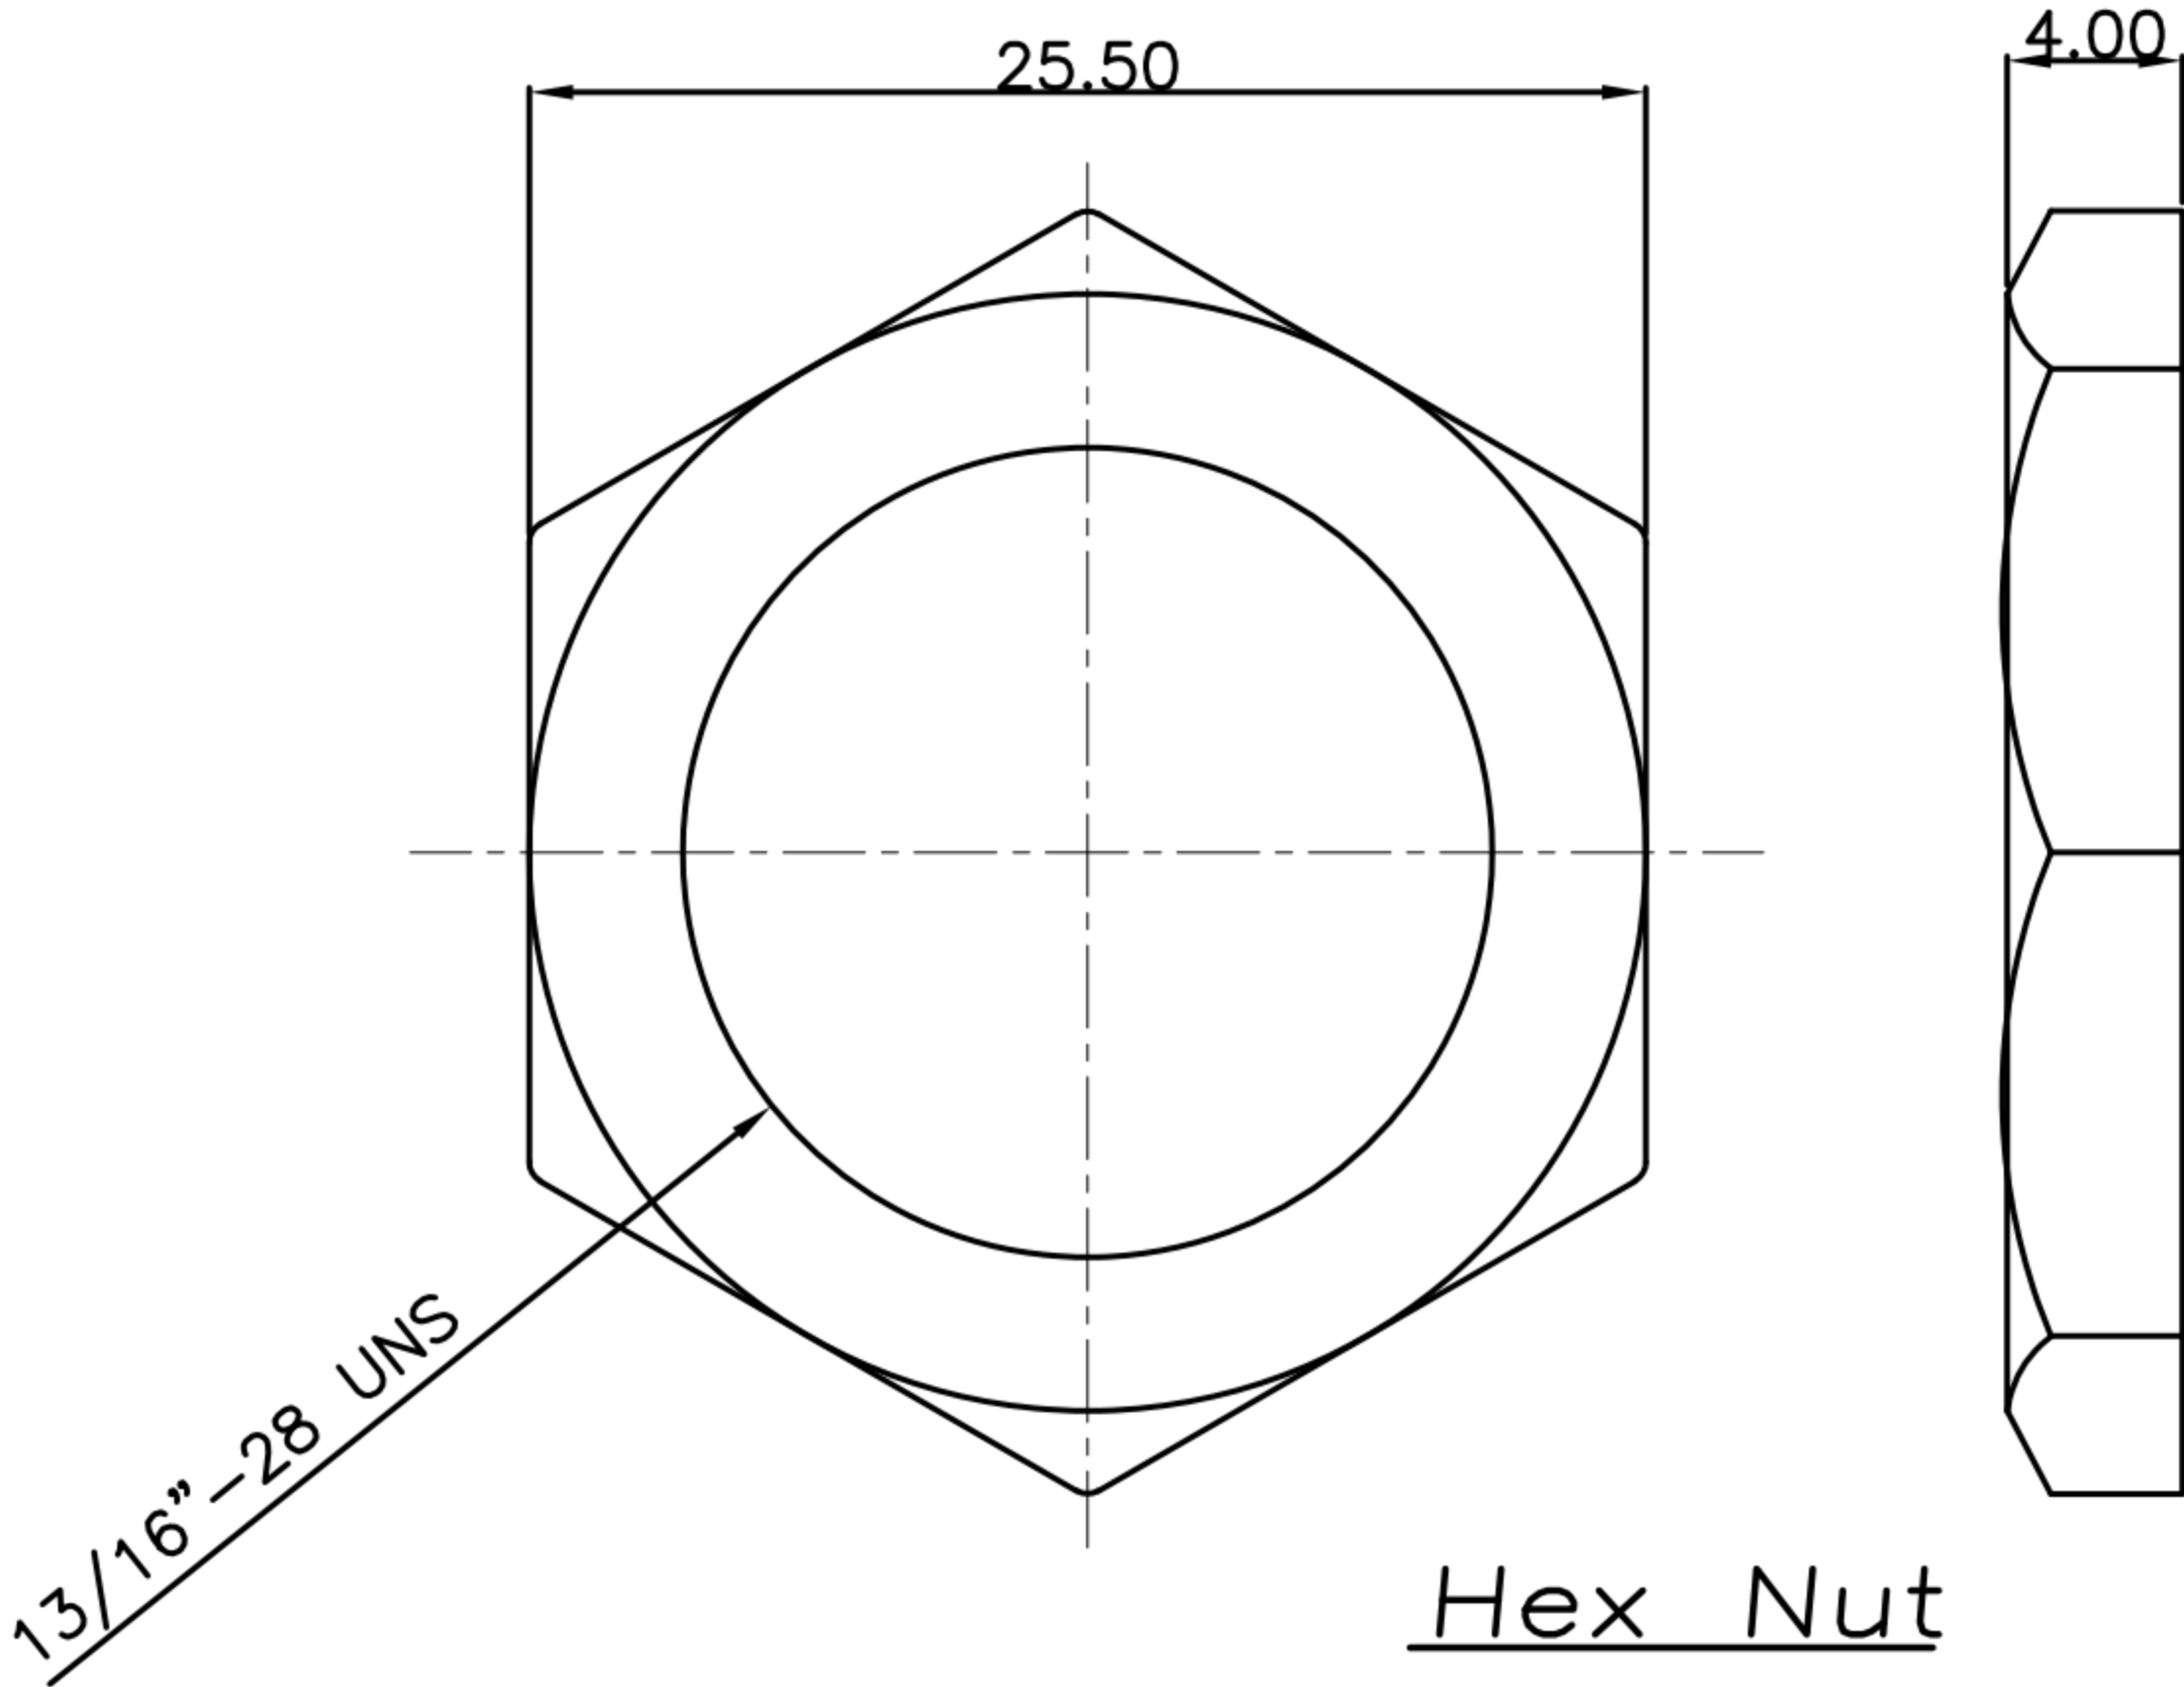

1. MATERIAL :
- 1-1. HOUSING : PA66
- 1-2. CONTACT : BRASS
- 1-3. GASKET : SILICONE
- 1-4. HEX NUT : PA66
2. FINISH :
- 2-1. CONTACT : GOLD FLASH PLATED.
3. ELECTRICAL SPECIFICATION :
- 3-1. Rated current : 2A
- 3-2. Rated Voltage : 250V
- 3-3. Water proof : IP67
4. Environmental :
- 4-1. Operation Temperature : -40℃~105℃

RECOMMEND PANEL CUT-OUT

DRAWN	Emily Suen	APP'D	Ku Chou	UNIT	mm	TOLERANCE				TITLE	WP C Size(M) Front Lock DIP Type(Lock Bayonet)			SHEET 1/2
CHK'D	Ku Chou			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°				PART NO.	SEE TABLE A	DWG NO.	QC8276	

广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.