


推柄局部尺寸详图
2:1



Pin 1 (VDD 3.3V)
Pin 2 (SDA)
Pin 3 (Switch)
Pin 4 (GND)
Pin 5 (SCL)

系列	KSD-JF151		
名称	树脂轴 JF15 圆孔万向型 (磁编码式摇杆)		
外型尺寸 (mm)	W	22.1	
	D	13.85	
	H	14.6	
轴材质	树脂		
功耗	0.36mA		
有效功能角度	27°Max各方向		
机械角度	27° Max各方向		
中央按动	有		
分压误差	45% ~ 55%		
工作温度	-10°C to +70°C		
操作寿命	2,000,000次以上		
按动作力	900±300gf		
接触阻抗	200Ω Max		
开关按压寿命	1,000,000次以上		
产品特点	无接触式操作使用寿命长 独有专利设计, 操纵杆复位精度高 采用进口原材料, 耐冲性能好		
应用领域	功能型游戏控制手柄、电子玩具、VR手柄等领域		

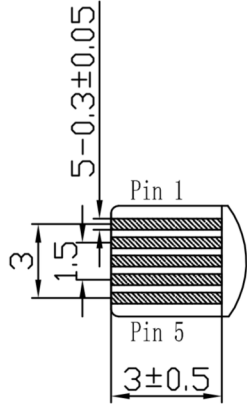

包装规格
托盘

包装数/箱 (pcs.)	包装箱尺寸/箱 (mm)
800	380*310*255

电气性能	电源电压 (Vcc)	Min: 3.3V
	单次测量模式下50Hz 采样频率平均电流	Typ: 1.8mA
	单次测量模式下50Hz 采样频率平均电流	Typ: 1.44mA
	单次测量模式下400Hz 采样频率平均电流	Typ: 2.86mA
机械性能	按动作力	500±200 gf
	控制杆复位精度	±0.2mm
	操作部强度	推拉方向: 2Kgf (Push/Pull) 动作方向: 2Kgf
耐候性	耐寒性能	-30°C 96h
	耐热性能	80°C 96h
	耐湿性能	60°C, 90 to 95% RH 96h

广东科斯达电子科技有限公司
KSDKG Guang dong Keside Electronic Technology Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	ROCKER POTENTIOMETER SWITCH
Jack Lu	07/23/13		MODLE	3D ROCKER POTENTIOMETER
CHECKED BY:	DATE	FINISH	DWG NO.	KSD-JF151
Jacky Chen	07/23/13		PART NO.	
APPROVED BY:	DATE	SCALE	SHEET NO.	1 of 1
Tony Kao	07/23/13			

2	公差及料號更新	Jack	072313
1	圖面更新	Frank Wu	021012
ITEM NO.	DESCRIPTION	DRAWN	DATE