

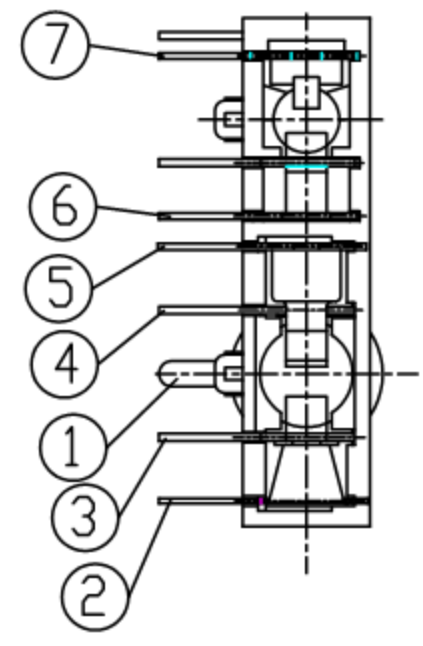
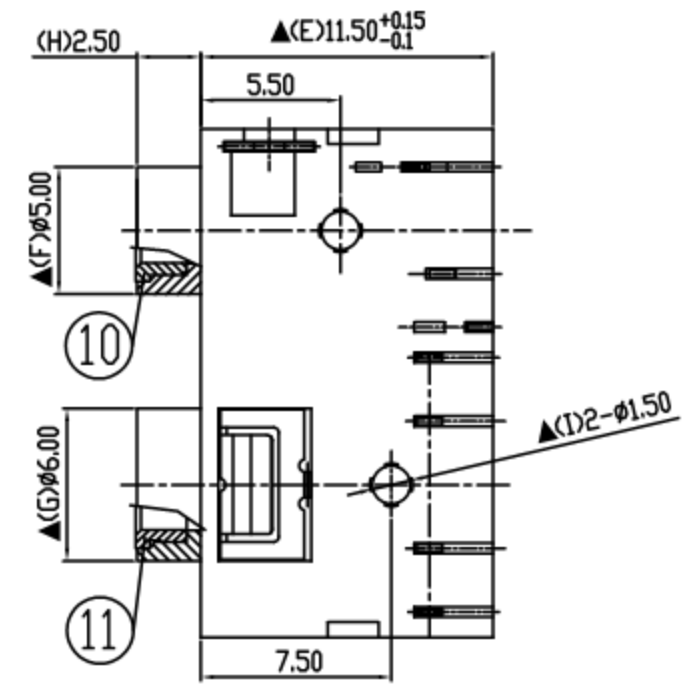
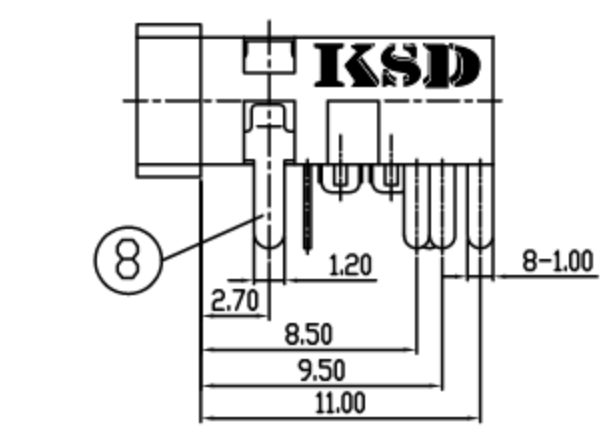
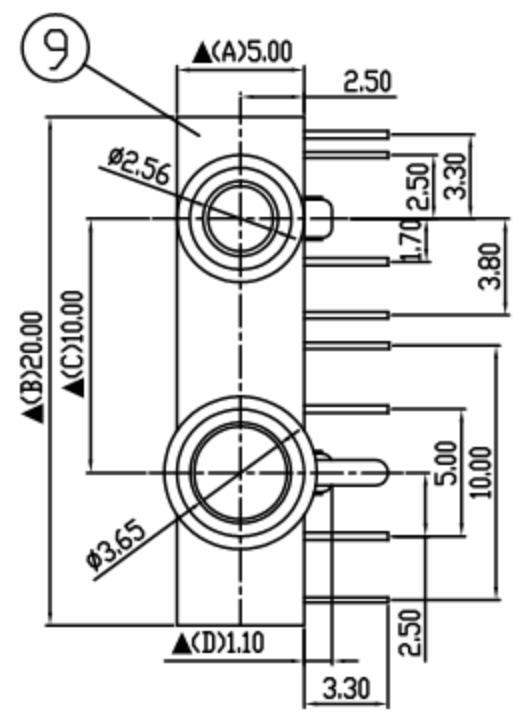


1 2 3 4 5 6 7

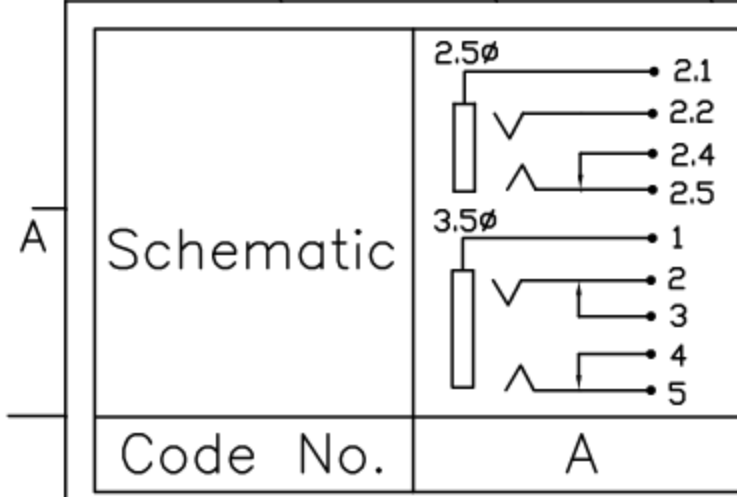

11.	Barrel 3.5φ	Brass	1	Nickel Plated
10.	Barrel 2.5φ	Brass	1	Nickel Plated
9.	Housing	PBT+15%G	1	Black Color
8.	Earth Terminal	0.3T Phosphor Bronze	1	Silver Plated
7.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
6.	Tip Spring	0.25T Phosphor Bronze	1	Silver Plated
5.	Tip Spring	0.25T TiCuR1-M-EH	1	Silver Plated
4.	Break Terminal	0.3T Bronze	1	Silver Plated
3.	Break Terminal	0.3T Bronze	2	Silver Plated
2.	Ring Spring	0.2T TiCuR1-M-EH	1	Silver Plated
1.	Earth Terminal	0.25T Phosphor Bronze	1	Silver Plated
NO.	Descripcion	Material	Q'TY	Finish

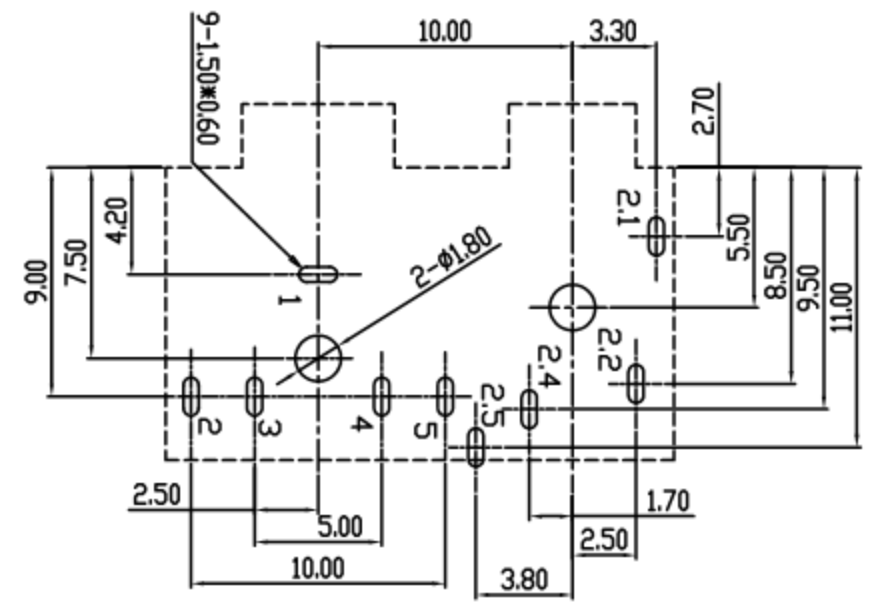

Pin Hole Layout
(Jack Bottom View)

	广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
		10.11.2012				

PART NAME : 3.5φ PHONE JACK	PART NUMBER : SCJ375R0NAS0B00G	VERSION:4.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED		SCALE:1/1

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

RoHS Compliant
 For Reference 僅供參考

1 2 3 4 5 6 7