


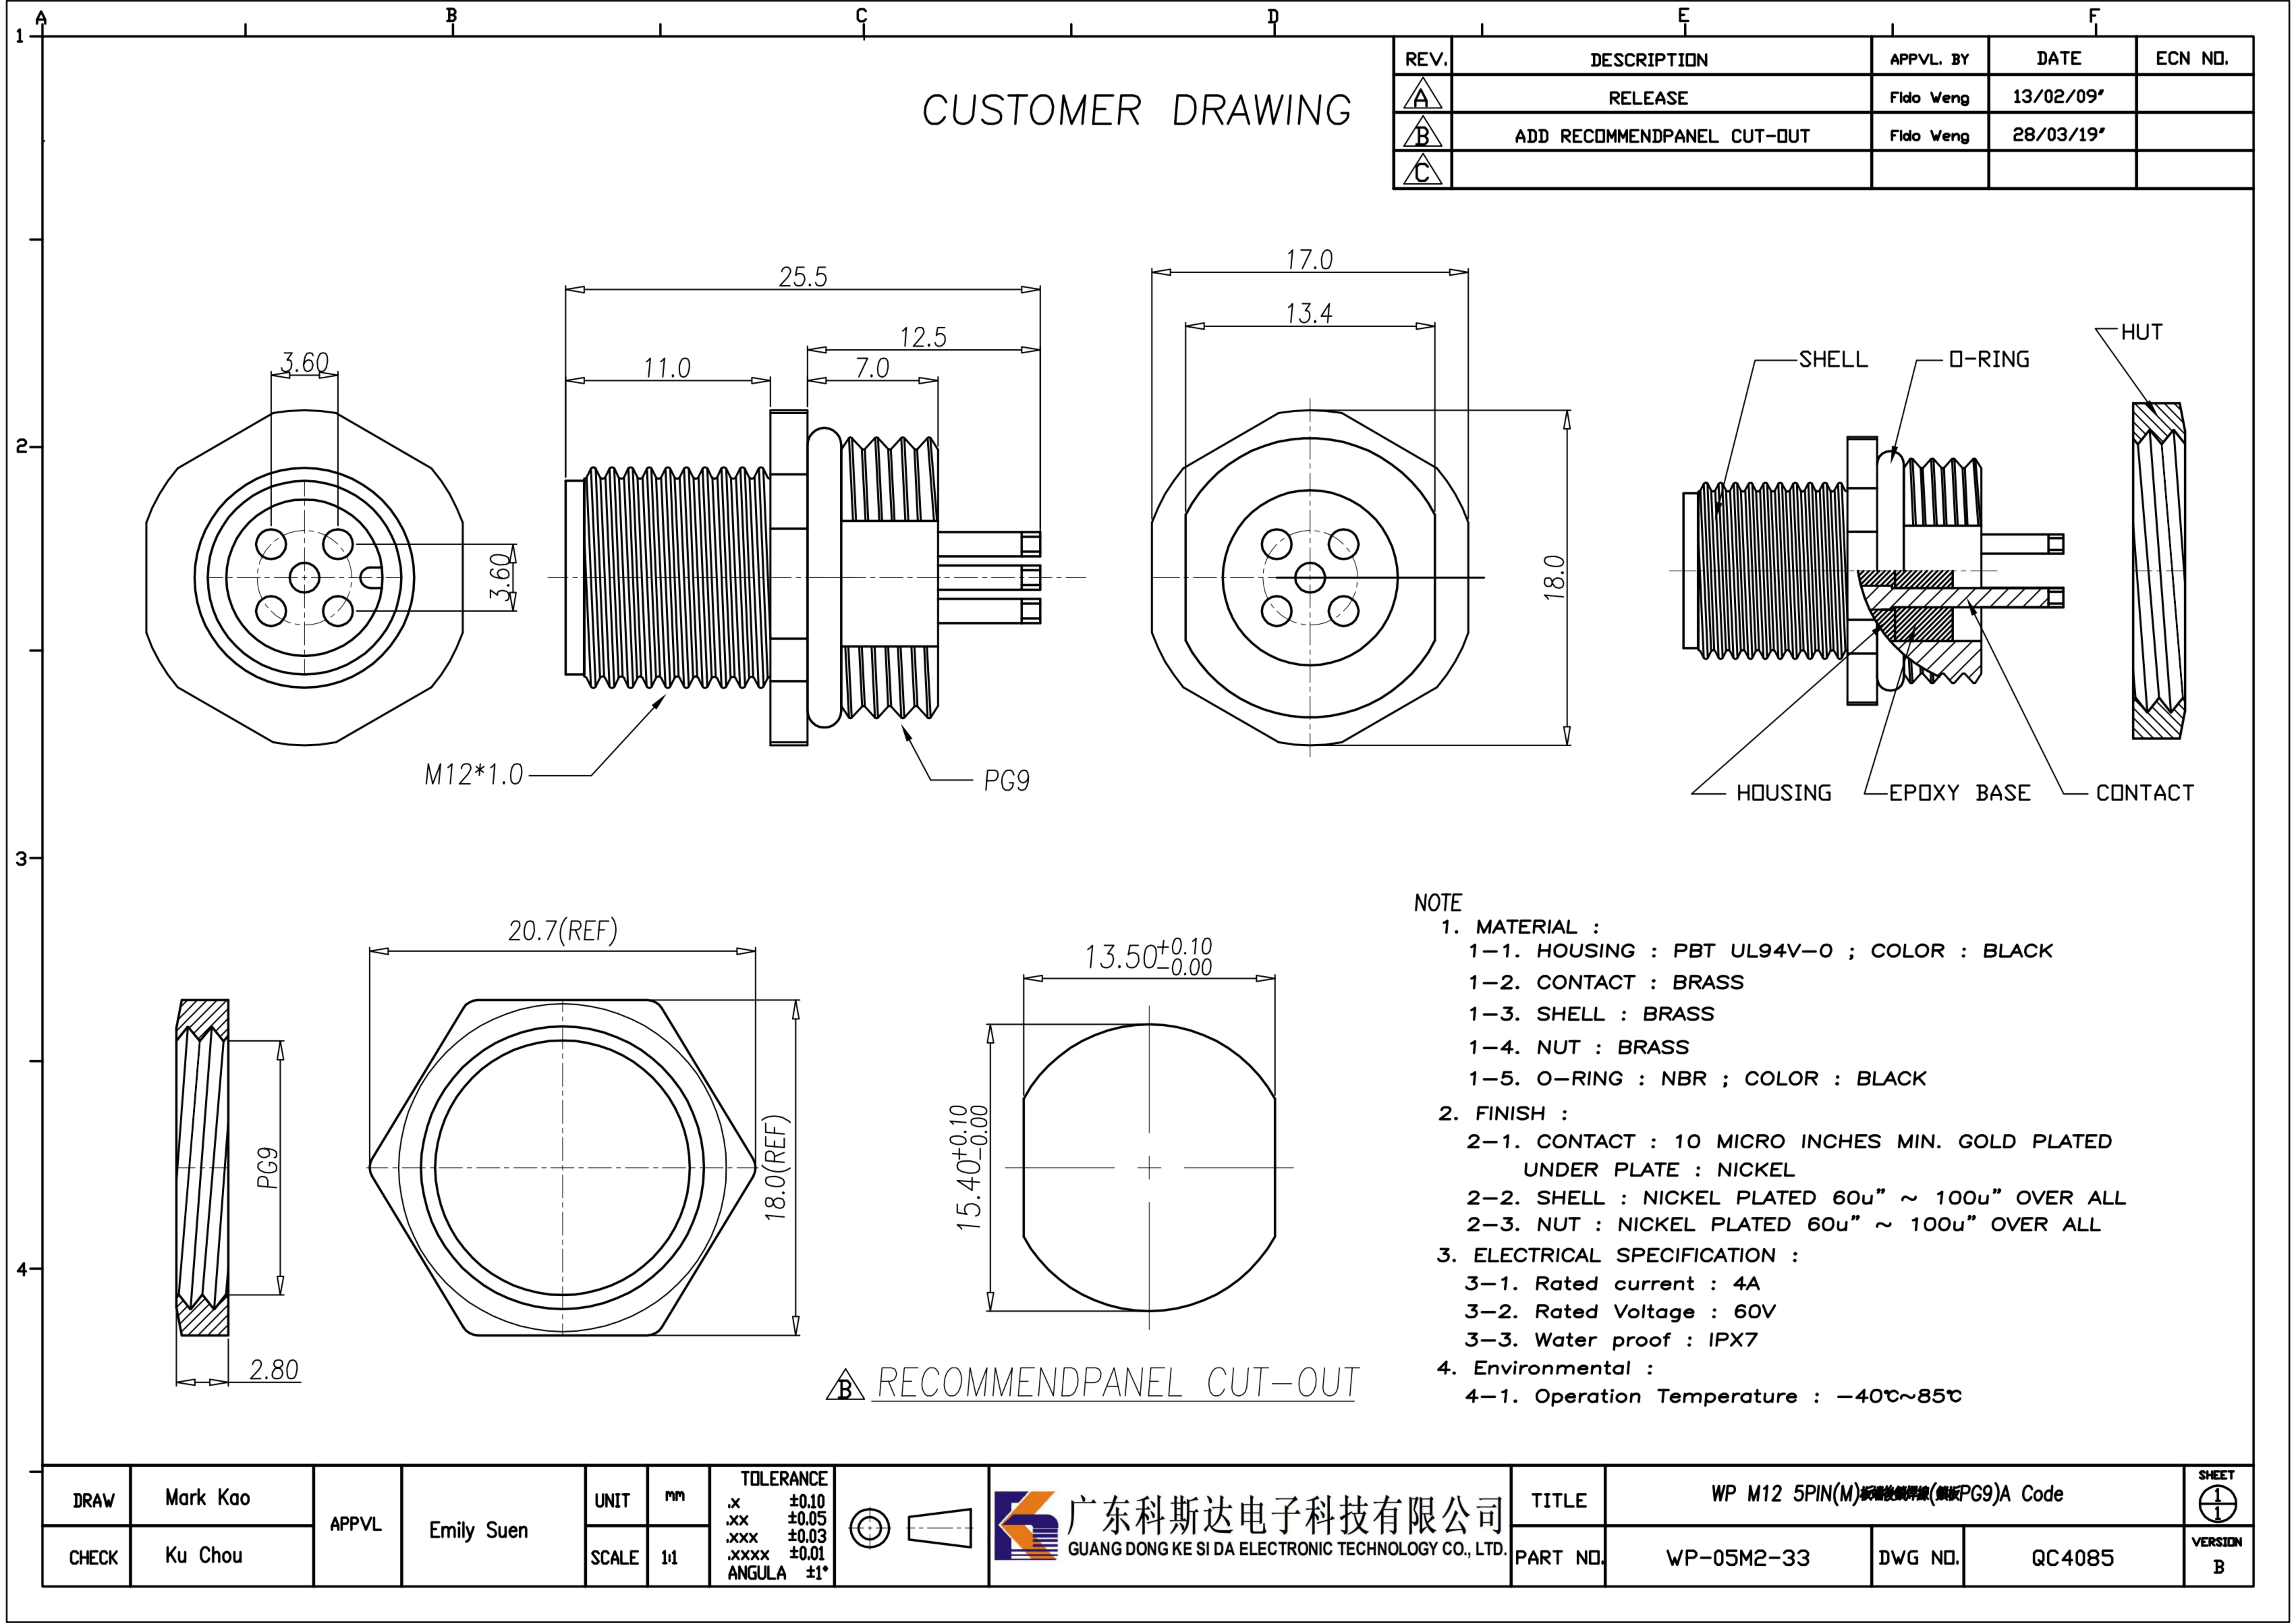

CUSTOMER DRAWING

REV.	DESCRIPTION	APPVL. BY	DATE	ECN NO.
A	RELEASE	Fido Weng	13/02/09'	
B	ADD RECOMMENDPANEL CUT-OUT	Fido Weng	28/03/19'	
C				

- NOTE
- MATERIAL :
 - HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - CONTACT : BRASS
 - SHELL : BRASS
 - NUT : BRASS
 - O-RING : NBR ; COLOR : BLACK
 - FINISH :
 - CONTACT : 10 MICRO INCHES MIN. GOLD PLATED
UNDER PLATE : NICKEL
 - SHELL : NICKEL PLATED 60u" ~ 100u" OVER ALL
 - NUT : NICKEL PLATED 60u" ~ 100u" OVER ALL
 - ELECTRICAL SPECIFICATION :
 - Rated current : 4A
 - Rated Voltage : 60V
 - Water proof : IPX7
 - Environmental :
 - Operation Temperature : -40℃~85℃

RECOMMENDPANEL CUT-OUT

DRAW	Mark Kao	APPVL	Emily Suen	UNIT	mm	TOLERANCE .x ±0.10 .xx ±0.05 .xxx ±0.03 .xxxx ±0.01 ANGULA ±1°				广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	TITLE	WP M12 5PIN(M) 5PIN(M) (M12) PG9) A Code			SHEET
CHECK	Ku Chou			SCALE	1:1	PART NO.					WP-05M2-33	DWG NO.	QC4085	VERSION B	